



**FYB500 固体镶嵌自润滑轴承**  
**FYB500 Cylindrical Oilless Bushing**

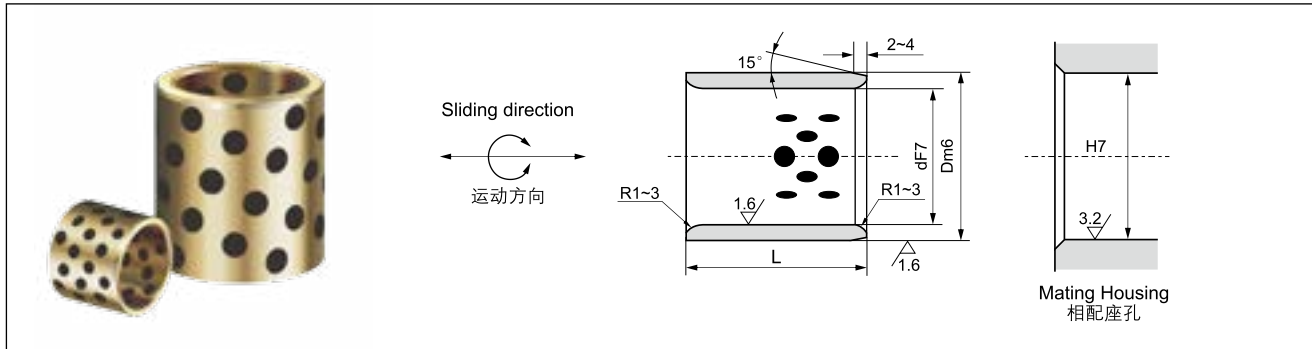

单位unit:mm

内径 F7 I.D. Ø d		外径 m6 O.D. Ø D		长度 L <sup>-0.1</sup> <sub>-0.3</sub>							
				8	10	12	15	16	19	20	25
6	+0.022 +0.010	10	+0.015 +0.006	061008	061010	061012					
8	+0.028 +0.013	12	+0.018 +0.007	081208	081210	081212	081215				
10		14		101408	101410	101412	101415			101420	
12		18		121808	121810	121812	121815	121816	121819	121820	121825
13		19			131910	131912	131915			131920	131925
14		20			142010	142012	142015			142020	142025
15	+0.034 +0.016	21			152110	152112	152115	152116		152120	152125
16		22			162210	162212	162215	162216	162219	162220	162225
17		23	+0.021 +0.008				172315				
18		24			182410	182412	182415	182416		182420	182425
19		26					192615			192620	
20		28			202810	202812	202815	202816	202819	202820	202825
-		30			203010	203012	203015	203016		203020	203025
22		32				223212	223215			223220	223225
25	+0.041 +0.020	33				253312	253315	253316		253320	253325
-		35				253512	253515	253516		253520	253525
28		38								283820	283825
30		-				303812	303815			303820	303825
-		40	+0.025 +0.009			304012	304015			304020	304025
32		42								324220	
35		44								354420	354425
-		45								354520	354525
38		48									
40		50					405015			405020	405025
-		55					405515				
45		-	+0.030 +0.011								
-		56									
-		60									

**FYB500 固体镶嵌自润滑轴承**  
**FYB500 Cylindrical Oilless Bushing**




d8: High load 高负荷  
 e7: Light load 轻负荷  
 f7: High precision 高精度

Material	650 # + Graphite
材质	高力黄铜 + 石墨

单位unit:mm

长度 L <sup>-0.1</sup> <sub>-0.3</sub>							压装后内孔 I.D. After Press-Fitting	适用垫圈 SPW	内径 I.D. Ø d
30	35	40	50	60	70	80			
							+0.019 +0.007	-	6
							+0.025 +0.010	-	8
								10	10
121830							+0.031 +0.013	12	12
131930								13	13
142030								14	14
152130	152135	152140					+0.030 +0.012	15	15
162230	162235	162240						16	16
								18	17
182430	182435	182440						18	18
								20	19
202830	202835	202840	202850					20	20
203030	203035	203040	203050					20	-
								25	22
253330	253335	253340	253350	253360				25	25
253530	253535	253540	253550	253560				25	-
283830		283840					+0.037 +0.016	30	28
303830	303835	303840	303850	303860				30	30
304030	304035	304040	304050	304060				30	-
324230		324240						35	32
354430	354435	354440	354450	354460				35	35
354530	354535	354540	354550	354560				35	-
		384840						40	38
405030	405035	405040	405050	405060	405070	405080		40	40
405530	405535	405540	405550	405560				40	-
455530	455535	455540	455550	455560			+0.045 +0.020	45	45
455630	455635	455640	455650	455660				45	-
456030	456035	456040	456050	456060	456070	456080		45	-


**FYB500 固体镶嵌自润滑轴承**  
**FYB500 Cylindrical Oilless Bushing**

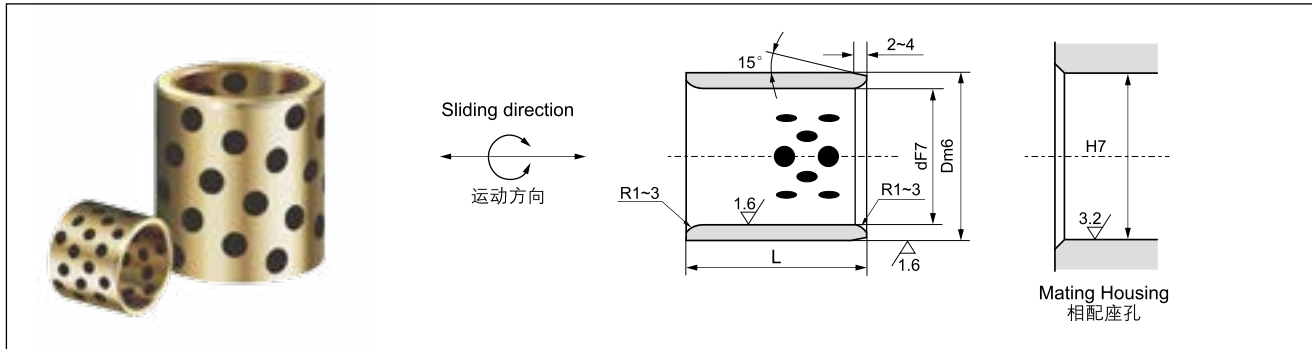

单位unit:mm

内径 F7 I.D. Ø d	外径 m6 O.D. Ø D	长度 L <sup>-0.1</sup> <sub>0.3</sub>									
		20	30	35	40	50	60	70	80		
50		60	506020	506030	506035	506040	506050	506060	506070	506080	
-	+0.050 +0.025	62		506230	506235	506240	506250	506260	506270	506280	
-		65		506530		506540	506550	506560	506570	506580	
55		70		557030	557035	557040	557050	557060	557070		
60		74		607430	607435	607440	607450	607460	607470	607480	
-		75		607530	607535	607540	607550	607560	607570	607580	
63		-						637560	637570	637580	
65		80				658040	658050	658060	658070	658080	
70	+0.060 +0.030	85		708530	708535	708540	708550	708560	708570	708580	
-		90					709050	709060	709070	709080	
75		-					759050	759060	759070	759080	
-		95					759550	759560	759570	759580	
80		96				809640	809650	809660	809670	809680	
-		100				8010040		8010060	8010070	8010080	
85		-						8510060		8510080	
90		110					9011050	9011060		9011080	
100	+0.071 +0.036	120					10012050	10012060	10012070	10012080	
110		130					11013050		11013070	11013080	
120		140							12014070	12014080	
125		145									
130		150								13015080	
140		160									
150	+0.083 +0.043	170								15017080	
160		180								16018080	
170		190									
180		200									
190		210									
200	+0.096 +0.050	230									

**FYB500 固体镶嵌自润滑轴承**  
**FYB500 Cylindrical Oilless Bushing**



d8: High load 高负荷  
 e7: Light load 轻负荷  
 f7: High precision 高精度

Material	650 # + Graphite
材质	高力黄铜 + 石墨

单位unit:mm

长度 L <sup>-0.1</sup> <sub>0.3</sub>							压装后内孔 I.D. After Press-Fitting	适用垫圈 SPW	内径 I.D. Ø d
90	100	120	130	140	150	200			
								50	50
							+0.045 +0.020	-	-
	5065100							-	-
								55	55
								60	60
	6075100						+0.055 +0.025	-	-
								65	63
								-	65
	7085100							70	70
								-	-
	7590100							75	75
	7595100						+0.054 +0.024	-	-
	8096100	8096120						80	80
	80100100	80100120		80100140				-	-
								90	85
9011090	90110100	90110120					+0.065 +0.030	-	90
10012090	100120100	100120120		100120140				100	100
	110130100	110130120						120	110
12014090	120140100	120140120		120140140			+0.064 +0.029	-	120
	125145100	125145120							125
	130150100		130150130						130
	140160100			140160140					140
	150170100				150170150		+0.076 +0.036		150
	160180100				160180150				160
	170190100				170190150				170
	180200100				180200150				180
	190210100				190210150				190
					200230150	200230200	+0.088 +0.042		200